

## Management of Software Driven Networks - Research Challenges

Alex Galis

Department of Electronic and Electrical Engineering  
University College London (UCL)  
London, United Kingdom  
a.galis@ucl.ac.uk

Stuart Clayman

Department of Electronic and Electrical Engineering  
University College London (UCL)  
London, United Kingdom  
s.clayman@ucl.ac.uk

**Abstract—** In this position paper we present a new networking framework – SdNET - that integrates software driven features with the management features of modern autonomic network management, and many service features from the world of Services. This framework is under development and validation.

**Keywords—**Software Driven Networking, Programmable Networks, Autonomic Networking and Management

### I. INTRODUCTION - SOFTWARE DRIVEN NETWORKS (SDNET) AS FUTURE NETWORKS (FN)

The rapid and continuous evolution of network technology and changing user requirements drives the research community to explore new concepts and paradigms that need to be addressed in the following 5-10 years. The final goal of the research is to devise a flexible, scalable, and robust end-to-end smart integrated network, which addresses the requirements coming from both users and operators, and is able to cope with the constraints imposed by both fixed and wireless access infrastructures. Our approach to this challenge is through programmable network infrastructures that support software driven features, which can be instantiated on-demand, based on the changing requirements and resource constraints. Software Driven Networking design goals, would include: network Programmability and Elasticity [2][7]; Integrated Virtualisation of Connectivity, Storage and Processing Resources, including the limited resources in smart objects [6]; In-Network Management ‘SdNET as a Service’ [1].

A non-exhaustive list of such features is described below.

- **Interworking** – SdNETs are represented by the inter-connection and inter-operation of several heterogeneous and dynamic networks sharing their virtualized resources. Resources such as processing, storage, and communication resources of multiple domains and networks would be made available to for aggregation to support provision of any service in a pervasive manner [8][9][10].
- **Service Access** – SdNETs should offer permissive access to different service providers: SdNETs should provide to service providers qualified access mechanisms to a set of network embedded resource-facing services, providing scalable, self-managed inexpensive networking infrastructures on demand [5].
- **Service Provisioning** – SdNETs can provide services of any complexity: Future Networks should support the

complete lifecycle of services that can be primarily constructed by combining existing elements, in new and creative ways, that often were not efficiently inter-operable before [3][4].

- **Network Empowerment** characteristics are: Service-, Content-, Knowledge-, Environmental-, Energy-, Economic - and Social- awareness [6].

The fundamental difference between SdNET and Next Generation Networks (NGN) is the switch from ‘packet-based’ systems such as those using the Internet Protocol (IP) with a separate transport and service strata in NGN to a packet-based network with service and management-aware characteristics, which is based on shared virtualized resources in form of processing, storage and communication resources, reaching even to the resources of the resource-constrained smart objects. These features of SdNET are shown in Figure 1.

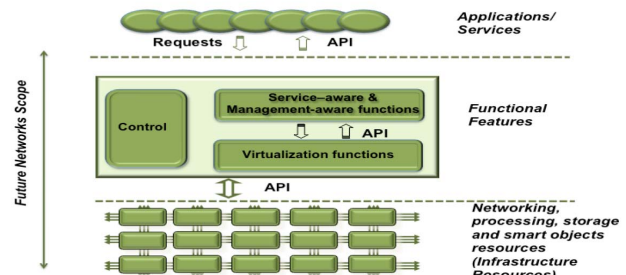


Figure 1 – Key Features in SdNET

### II. SDNET CONTROL & MANAGEMENT INFRASTRUCTURE

The following figure 2 presents the blueprint on the SdNET control and management infrastructure where the main functional blocks are as follows:

- **Operator Control** is responsible for the privileged control of the operators, who own the physical infrastructure.
- **Network Application and Service Control** is responsible for the management and the dynamic mapping of the service ecosystems to the virtual resources.
- **Virtual Network Control** is responsible for the dynamic setting-up and management of the unified virtual networks unifying the virtualisation of connectivity, computation and storage resources.
- **Virtual Resource Control** is responsible for the management and the dynamic mapping of the virtual resources to the heterogeneous physical resources.

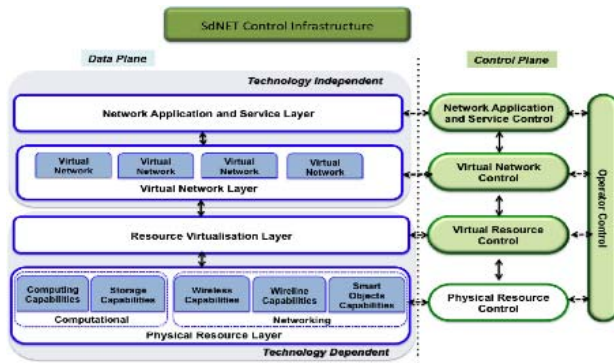


Figure 2 - Blueprint of SdNET Control & Management

### III. SDNET CHARACTERISTICS AND CHALLENGES

The Software Driven Network architecture is associated with the following characteristics and challenges:

- Unification and higher degree of virtualisation for all infrastructure systems: virtualisation of services, networks, storage, content, and resources as the means of enabling change from capacity concerns towards increased and flexible capability with operation control.
- Software driven features: network programmability and elasticity; integrated virtualisation of connectivity, storage and processing resources, including scarce resources in smart-objects; In-bound Management.
- New integration concepts enabling better integration and usage of the communication-centric, information-centric, resource-centric, content-centric, service/computation-centric, context-centric, management-centric faces.
- New virtual infrastructures addressing the unification and integration of connectivity, computation, storage and control resources.
- In-bound manageability: Embedded autonomic management in systems, elements and operations.
- Full network empowerment including Service-, Content-, Knowledge-, Environmental-, Energy-, Economic- and Social-awareness.
- Address explicitly a number of design requirements including: openness, economic viability, fairness, scalability, manageability, evolvability and programmability, autonomicity, mobility, ubiquitous access and usage, security including trust and privacy, large-scale heterogeneous systems integration and deployment.

### IV. SDNET CONTROL & MANAGEMENT TESTBED

UCL is developing an early implementation of an SdNET infrastructure to verify the design and architecture. This development is a small software-based service and network testbed - the Very Lightweight Software Driven Network and Services (VLSP) [1][11], which comprises a very lightweight virtual router element combined with virtual network connectivity. These elements can be combined in order to build any network topology required. The created virtual network is designed with the goal of transmitting and routing datagrams from any source to any

destination. It behaves like a lightweight virtual datagram network, but it has management facilities to start and stop virtual routers on-the-fly, together with the ability to create and destroy network connections between virtual routers dynamically. Furthermore, these lightweight routers have an application layer interface that provides the capability to start and stop Java software applications. It was tested with a topology of 700 virtual nodes. Figure 3 shows how the elements of the VLSP map onto the SdNET.

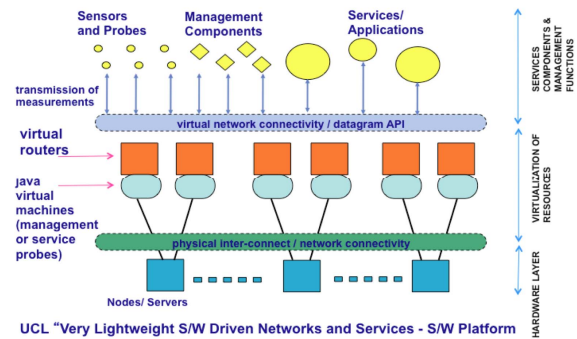


Figure 3 - UCL "Very Lightweight S/W Driven Networks and Services - S/W Platform"

### ACKNOWLEDGMENT

This work is partially supported by the European Union UniverSELF project [1].

### REFERENCES

- [1] UniverSELF project - <http://www.univerself-project.eu/>
- [2] Galis, A., Denazis, S., Brou, C., Klein, C. (ed) - "Programmable Networks for IP Service Deployment" ISBN 1-58053-745-6, pp 450, June 2004, Artech House Books, [www.artechhouse.com](http://www.artechhouse.com)
- [3] Galis, S. Clayman, S., L. Lefevre, A. Fischer, H. de Meer, J. Rubio-Loyola, J. Serrat, S. Davy - "Towards In-Network Clouds in Future Internet" in - Lecture Notes in Computer Science, Vol. 6656, 465 pp, ISBN 978-3-642-20897-3, 4th May 2011
- [4] Rubio-Loyola, J., Galis, A., Astorga, A., Serrat, J., Lefevre, L., Fischer, A., de Meer, H., "Scalable Service Deployment on Software Defined Networks" - IEEE Communications Magazine/Net. and Service Management Series, ISSN 0163-6804; Dec. 2011
- [5] Galis, H. Abramowicz, M. Brunner, D. Raz, P. Chemouil, S. Clayman, et al "Management and Service-aware Networking Architectures (MANA) for Future Internet - Position Paper." - Invited paper IEEE ChinaCom- 26-28 August 2009, Xi'an, China, <http://www.chinacom.org/2009/index.html>.
- [6] ITU-T Y.3001 Recommendation "Future Network Vision - Objectives and Design Goals"; Y.3011 Recommendation: "New Framework of network virtualization for Future Networks"; Y.3021 Recommendation - "New Framework of energy saving for Future Networks" 2011- <http://www.itu.int/en/ITU-T/focusgroups/fn/Pages/Default.aspx>
- [7] NEBULA project website, <http://nebula.cis.upenn.edu>
- [8] Open Networking Foundation [www.opennetworking.org/index.php](http://www.opennetworking.org/index.php)
- [9] Open Flow Publication <http://www.openflow.org/>
- [10] Nick McKeown et al. (2008-04). "OpenFlow: Enabling innovation in campus networks". ACM Communications Review. Retrieved 2009-11-0
- [11] G. Clegg, R., Clayman, S., Pavlou, G., Mamatas, L., Galis, A. - "On the Selection of management and monitoring nodes in dynamic networks" - IEEE Transactions on Computers, 6 March 2012, <http://doi.ieeecomputersociety.org/10.1109/TC.2012.67>